



It dominates the hillside, soars over the plain

T *SERIES*
MAJOR



TOTALLY AC TRACTORS

Dynamism, agility, efficiency are the results of these new generation, compact tractors designed for specialised agricultural operators on plains, hillsides and mountainsides along with the crops on the Mediterranean basin where grip, handling and dimensions are deciding factors. The “T” Major Series is made up of various steering or articulated models; with equal-sized wheels or with larger rear wheels. Its perfect weight distribution, guaranteed by the ACTIO™, over all four wheels, ensures grip, stability and top level safety.

T MAJOR Series



TN



ACTIO

EXG

4 YEARS

12+12
SYNCHRONIZED
WITH INVERTER

30

2200

Wheels			
Front/Rear	X	Y	
7.50-16	270	1235	
8.25-16	270	1265	
7.50-18	300	1280	
250/80-18	290	1305	
280/70-18	280	1380	
300/80-15.3	285	1395	
29x12.50-15	225	1440	
31x15.50-15	240	1615	

Model

TN 5800

Chassis

ACTIO™-Full chassis with oscillation • Steering wheels • Front and rear final drive

Engine Type

Direct injection
• Counter rotating
Stage 3A

Emissions Regulations

N° Cylinders

Displacement (CC)

Power kW/HP (97/68/CE)

Maximum engine revs

Torque max (Nm/revs)

Cooling

Tank Capacity (litres)

Transmission

PTO

Rear hydraulic lift

Operating Pressure (bar)

Steering

Brakes

Weight (Kg)

4 equal wheel drive	4 unequal wheel drive
Direct injection	Direct injection
• Counter rotating	• Counter rotating
Stage 3A	Stage 3A
4	4
2188	2188
36,5/49,7	36,5/49,7
3000	3000
139/1800	139/1800
Water	Water
42	42
Synchronized 24 speed gear box: 12 forward and 12 reverse with inverter	
Independent, with mechanic control, standard speed 540 rpm and synchronized	
3-points hitch Cat. 1 - Capacity (Kg): 2200	
130	130
Hydraulic with 2 double acting pistons with “Load Sensing” system	
Mechanic rear oil bath disc brakes - Steering brakes	
Rear axle and parking handbrake with control lever operating the main device	
1630	1760


Standard Features

• Front and rear differential locks, foot lock, with mechanic control • Adjustable suspension seat • Safety belts • Rear adjustable height tow hitch • Front tow hitch • Foldable protection roll bar • Adjustable wheel rims • Horn • Lights, braking and turning indicators • Unipolar socket and 7 way trailer socket • Series of control lights • Tachometer/revolution counter • Safety starting switch • Battery isolation switch


Optional Features

• Hydraulic power lift with draft and position control • PTO at 540 and 1000 rpm • Rear revolving working light • 4 types of ancillary hydraulic systems with single-acting and double-acting manifolds (up to 5 rear quick couplers) • Steering column adjustable in tilt • Digital speedometer • Pneumatic suspension seat • Wheel ballasts • Cast iron wheel flanges for 20” rear wheels (only for TC F)

DIMENSIONS: TN

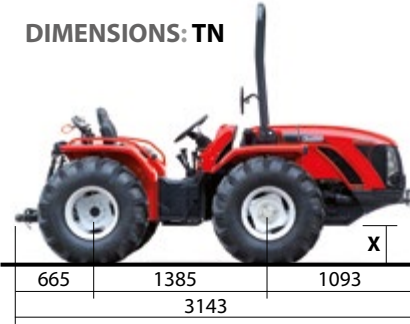

DIMENSIONS: TC F

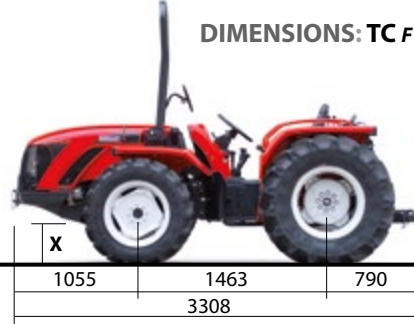

Wheels			
Front	Rear	X	Y
8.25-16	280/85 R20	263	1325
300/80-15.3	360/70 R20	304	1465
280/70-18	360/70 R20	272	1435

4 YEARS

ACTIO

EXG

12+12
SYNCHRONIZED
WITH INVERTER

30

2200



T MAJOR Series

SNv



DIMENSIONS: SN v

Wheels			
Front/Rear	X	Y	
7.50-16	270	1035	
7.50-18	300	985	
250/80-18	290	1075	
280/70-18	280	1175	
300/80-15.3	310	1180	



4 YEARS

EXG

Model

SN 5800 V

Chassis

ACTIO™ Full chassis with oscillation • Articulated
• 4 equal wheel drive • Front and rear final drive

Engine Type

Direct injection
• Counter rotating

Emissions Regulations

Stage 3A

N° Cylinders

Displacement (CC)

Power kW/HP (97/68/CE)

Maximum engine revs

Torque max (Nm/revs)

Cooling

Tank Capacity (litres)

Transmission

PTO

Rear hydraulic lift

Operating Pressure (bar)

Steering

Brakes

Weight (Kg)

Synchr. 24 speed gear box: 12 forward and 12 reverse with inverter and synchronized
3-points hitch Cat. 1 - Capacity (Kg): 1700
130
Hydraulic with 2 pistons with “Load Sensing” system
Hydraulic rear oil bath disc brakes - Independent emergency and parking brake: band type on transmission
1600

Standard Features

• Front differential lock with mechanic control, rear with hydraulic control • Adjustable suspension seat • Safety belts • Rear adjustable height tow hitch • Front tow hitch • Foldable protection roll bar • Adjustable wheel rims • Horn • Lights, braking and turning indicators • Unipolar socket and 7 way trailer socket • Series of control lights • Tachometer/revolution counter • Safety starting switch • Battery isolation switch

Optional Features

• Hydraulic power lift with draft and position control • PTO at 540 and 1000 rpm • Rear revolving working light • 4 types of ancillary hydraulic systems with single-acting and double-acting manifolds (up to 5 rear quick couplers) • Steering column adjustable in tilt • Digital speedometer • Pneumatic suspension seat • Wheel ballasts • Lifting arms with quick release couplings • Spacers for rear and front mudguards

ACTIO

EXG

12+12
SYNCHRONIZED
WITH INVERTER

30

1700

TIGRECAR



Model TIGRECAR 5800

Chassis

ACTIO™-Full chassis with oscillation • Steering wheels
• 4 equal wheel drive • Front and rear final drive

Engine Type

Direct injection counter rotating weight system
Emissions Regulations: Stage 3A N° Cylinders: 4
Displacement (CC): 2188 Power kW/HP (97/68/CE): 36,5/49,7
Maximum engine revs: 3000 Torque max (Nm/revs): 139/1800
Cooling: Water Tank Capacity (litres): 48,5

Transmission

PTO

Steering

Brakes

Synchr. 16 speed gear box: 8 forward and 8 reverse with inverter
Standard speed 540 rpm and synchronised
Single double rod hydraulic cylinder
Standard: Hydraulic front and rear brakes in oil bath
Emergency and parking: band type on transmission
Suspended on Silent Block

Platform

Weight (Kg)

Tyres

Standard Features

2190 A pieno carico (Kg): 4500
10.0/75-15.3 280/70 R16
• Container cm 240x150x30 complete with inclination system • Rear differential lock with hydraulic control • Hydraulic controlled drive disengagement • Adjustable sprung seat • Safety belts • Rear adjustable height tow hitch • Protection frame with 4 uprights with roof • Hydraulic system consisting of 1 simple acting distributor for movement of container • Horn • Lighting equipment • Electric power socket and plug • Stop lights and turn signals • Centralized control board • Safety starting switch on inverter and PTO • Tachometer • Battery isolation switch

Optional Features

• Heating cab • Windscreen with windscreen wiper • “Superbrake” system • Column adjustable in height and tilt • Flashing light

DIMENSIONS: TIGRECAR



2 YEARS

ACTIO

EXG

8+8
SYNCHRONIZED
WITH INVERTER

35